


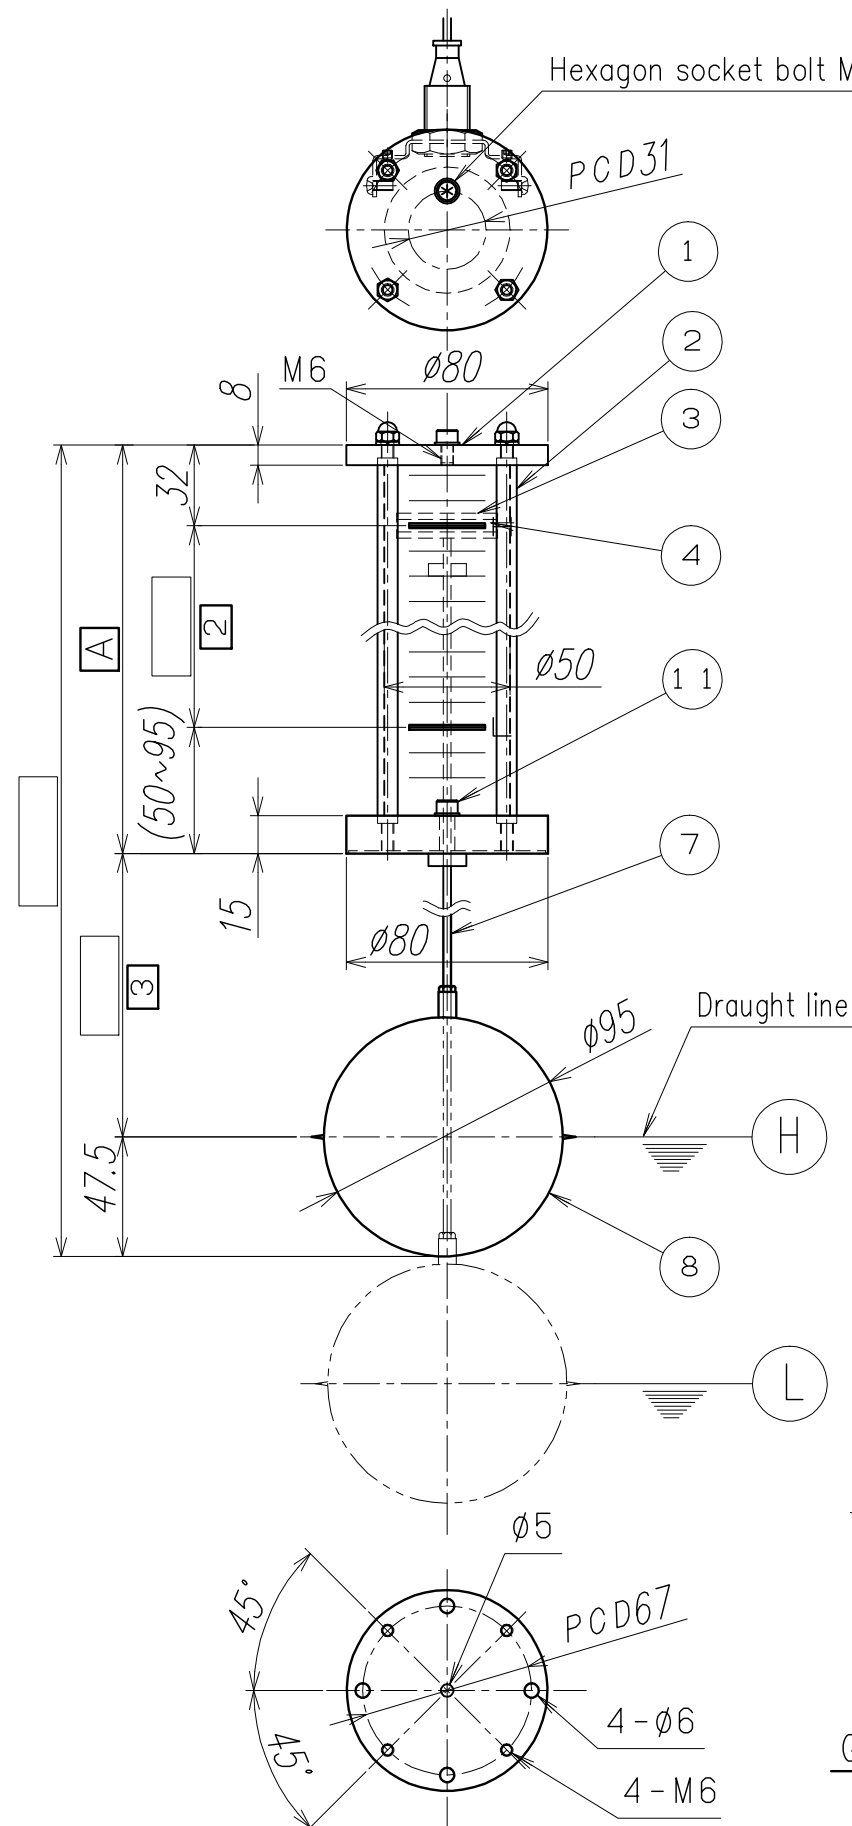

Type

CLG-1-S1 - ** - ** - ** ESL
Common type Switch The space between H and L Size from under flange to center of float For washing machine (buoyancy is large)

CODE	Switch
00	None
0K	One for lower limit
K0	One for upper limit
KK	One each for upper and lower limits space between H and L
3K	Three
4K	Four

CODE	The space between H and L	"A" Size
00	~ 50 mm	132 mm
0K	55 ~ 100 mm	182 mm
K0	105 ~ 150 mm	232 mm
KK	155 ~ 200 mm	282 mm
3K	205 ~ 250 mm	332 mm
4K	255 ~ 300 mm	382 mm
	305 ~ 350 mm	432 mm
	355 ~ 400 mm	482 mm
	405 ~ 450 mm	532 mm
	455 ~ 500 mm	582 mm

CODE	Size from under flange to center of float
00	70
0K	The custom-designed size of 70mm or more can be produced.

Specification of Proximity Sensors		
Load voltage	DC 12~24 v	
Control output	Load current	3 ~ 100 mA
	Diagnostic output	50 mA以下
Response frequency	0.5 KHz	
Ambient temperature range	-25 ~ 70 °C	

15	Bracket	**	Fe	BK-004	
14	Stopper	**	Aluminum	AL12-001	
13	Stopper	1	Aluminum	AL12-001	
12	Proximity Sensors	**	OMRON / YAMATE	E2E-X7D1-N / FL7M-7J6HD	
11	Hexagon socket bolt	4		M5	
10	Gasket	1	Silicone rubber	G67-001	
8	Float	1	SUS316	W95-001	
7	Shaft	1	SUS304	P3-002	
6	Flange	1	Aluminum	F80A-020	
5	Pipe	1	Polyarylate	S50-002	
4	Collar	1	Fe	KC-427	
3	Spacer	2	Acrylic	MS40-001	
2	Pipe & Free-size Bolt or Tie rod	4	SUS304 & SS400	Pipe (SUS304) & FREE-SIZE BOLT (SS400) or 8 Tie rod (SUS304)	
1	Flange	1	Aluminum	F80A-010	
No.	PART NAME	Q'TY	MATERIAL	TYPE	REMARKS

Address 1519, Wakabadai
Meito-ku, Nagoya-shi, Aichi 465-0015,
Japan
Tel: 052-760-3365 Fax: 052-760-3375

Note
*Please use it when 2 + 3 is 800mm or more.
2014.02.10

APPROVED CHECKED DESIGNED SCALE NAME
1/3
CLEAN LEVEL TOWER (Type: Cleaning agent)
CLG-1-S1-**-**-**ESL
KOIKE E&S CO., LTD.